





CM01 – Concrete and Masonry Structures 1

HW1 – Preliminary design of frame structure

Task 1

Task 1 – Frame structure


In Task 1, frame structure will be designed.

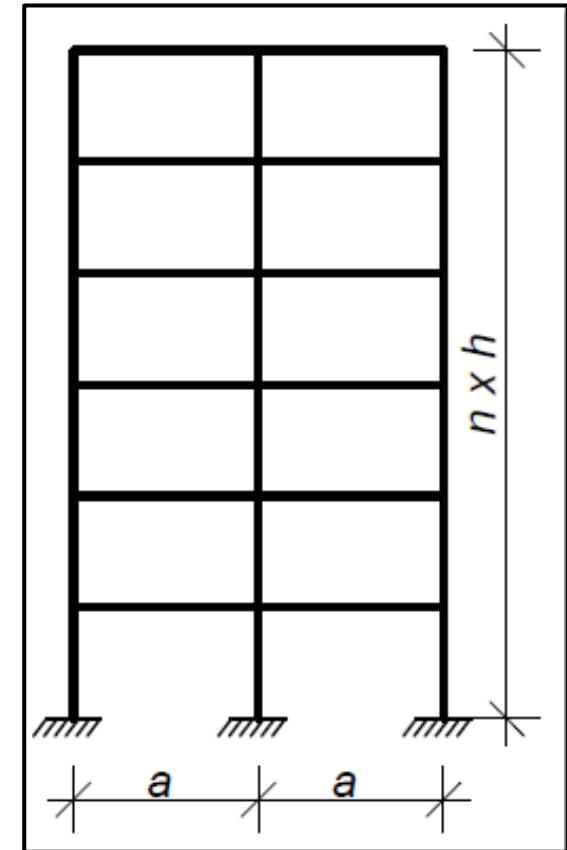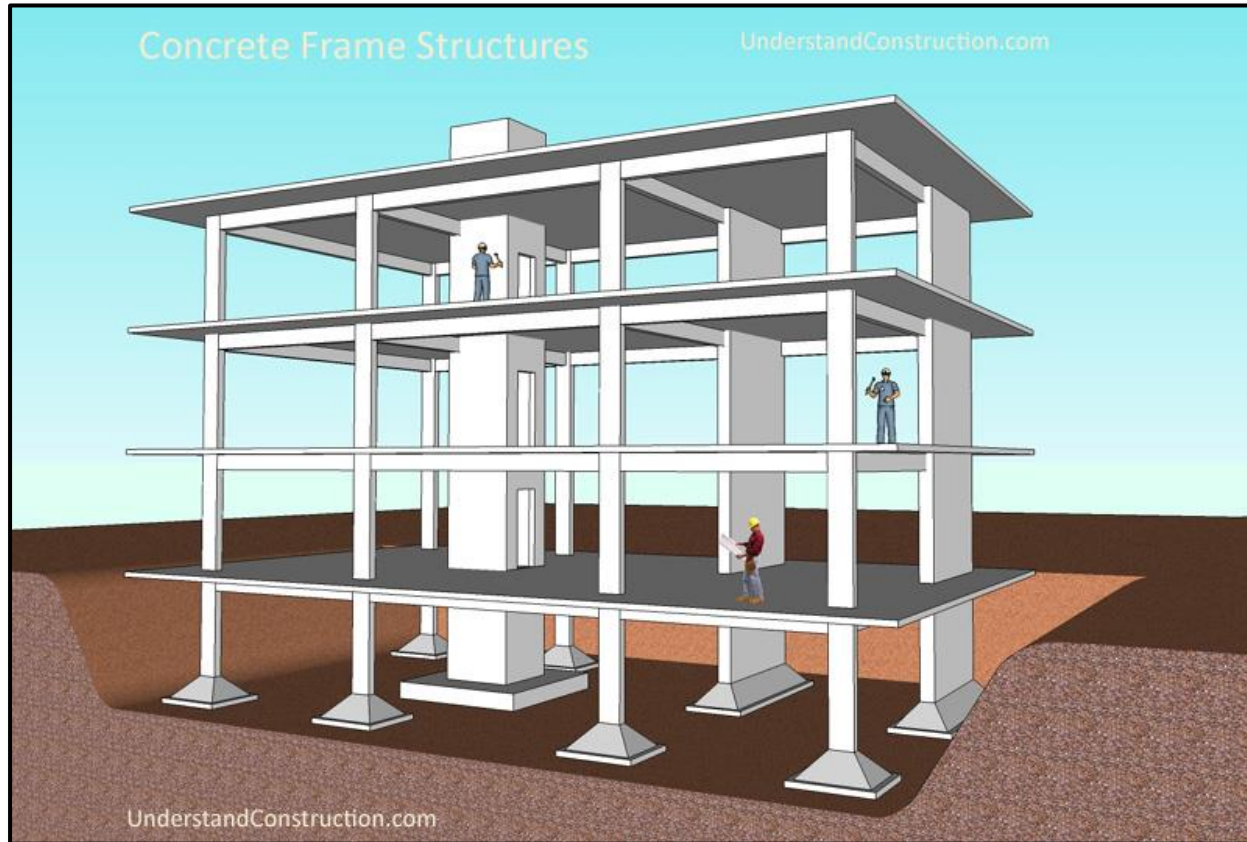

Task 1 – Assignment

Scheme of the structure:

Plan:

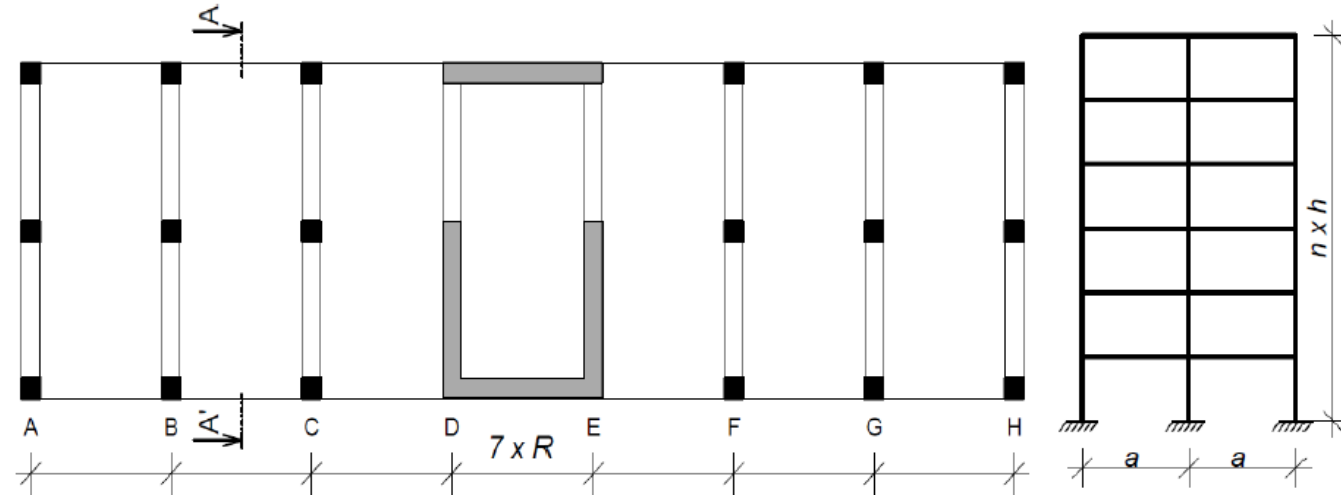

Individual parameters (parameters in **bold** you can find on teacher's website):

Geometry: **R** , **a** [m] – horizontal dimensions, **h** [m] – floor height, **n** – number of floors

Materials: Concrete – **concrete class**
Steel B 500 B ($f_{yk} = 500$ MPa)

Loads: Other permanent load of typical floor (**$g-g_0$**)_{floor,k} [kN/m²]
Other permanent load of the roof (**$g-g_0$**)_{roof,k} [kN/m²]
Live load of typical floor **q** _{floor,k} [kN/m²]
Live load of the roof **q** _{roof,k} = 0,75 kN/m²
Self-weight of the slab according to calculated depth

Another parameters: **S** – Exposure class related to environmental conditions
 Z – Working life of the structure

Task 1 – Assignment goals

Our goal will be to:


- **Design the dimensions** of all elements.
- Do detailed **calculation of 2D frame** – calculation of bending moments, shear and normal forces using FEM software.
- **Design steel reinforcement** in the members.
- **Draw layout** of the reinforcement.

Task 1 – part 1

Task 1 – part 1

In this seminar, we will design dimensions of all structural members – i.e.:

- depth of the **slab**,
- cross-sectional dimensions of the **beam**,
- cross-sectional dimensions of the **column**.

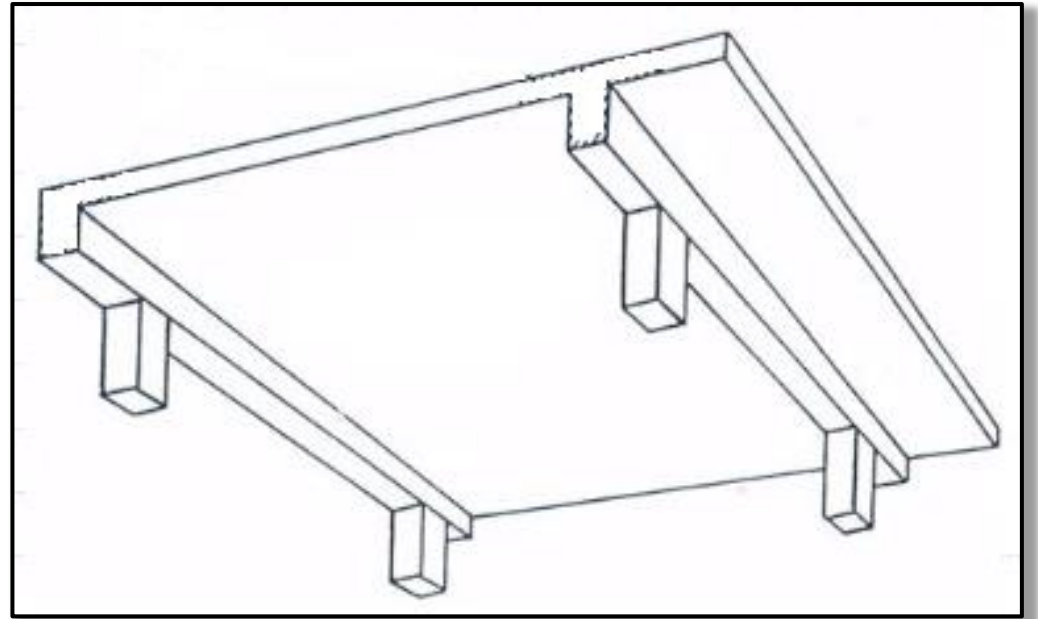

We will also do a sketch of the structure.

Task 1 – part 1


Slab

Depth of a one-way slab

Empirical estimation of slab depth:

$$h_s = \frac{L_s}{30} \text{ to } \frac{L_s}{25}$$

The slab depth must be multiple of 10 mm.

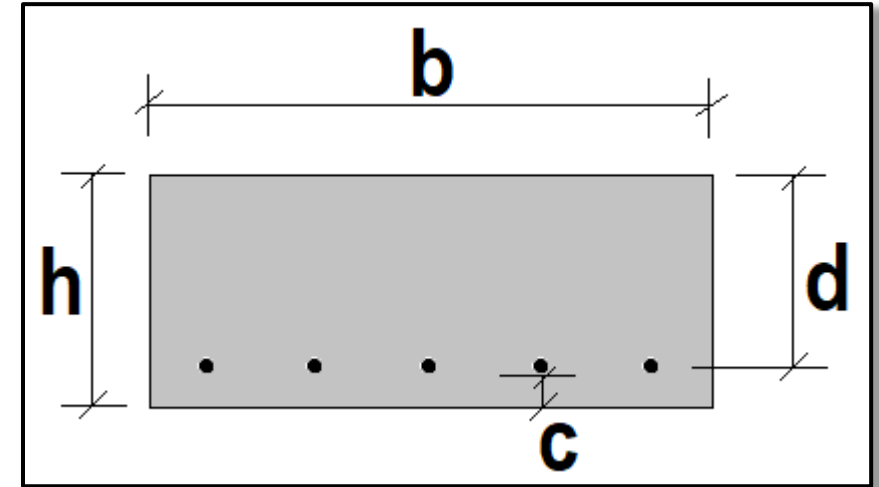

Calculation of slab effective depth:

$$d_s = h_s - c - \frac{\varnothing}{2}$$

Diameter of steel bars (assume 10 mm)

Cover depth

Cover depth c


Concrete cover for reinforcement is calculated using the equation:

$$c \geq c_{min} + \Delta c_{dev},$$

where

$$c_{min} = \max(c_{min,b}, c_{min,dur}, 10 \text{ mm}),$$

$$\Delta c_{dev} = 10 \text{ mm}.$$

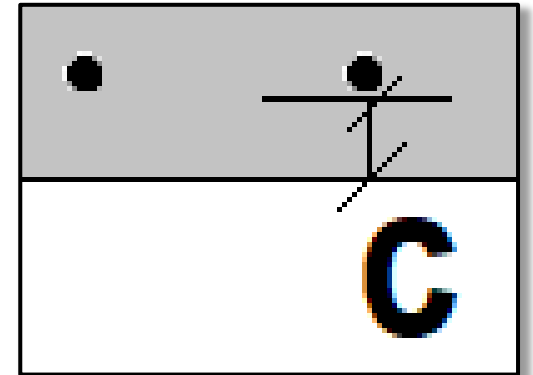

Cover depth necessary for good mechanical bond between steel and concrete $c_{min,b}$ is equal to diameter of steel bars ($c_{min,b} = 10 \text{ mm}$).

Cover depth necessary for good resistance to unfavourable effects of the environment is obtained using the following table.

Cover depth $c_{min,dur}$

Step 1: Determine structure class (default is S4).

Structural class								
Criterion	Exposure class related to environmental conditions							
	XD	XC1	XC2	XC3	XC4	XD1/XS1	XD2/XS2	XD3/XS3
Working life 80 years	increase class by 1							
Working life 100 years	increase class by 2							
Concrete class	decrease class by 1 if concrete class is at least:							
	C20/25	C25/30	C30/37	C35/45	C40/50	C40/50	C40/50	C45/55
Member with slab geometry	decrease class by 1							
Special quality control of concrete	decrease class by 1							

Cover depth $c_{min,dur}$

Step 2: Determine cover depth.

Values of $c_{min,dur}$ [mm]							
Structural class	Exposure class related to environmental conditions						
	X0	XC1	XC2/XC3	XC4	XD1/XS1	XD2/XS2	XD3/XS3
S1	10	10	10	15	20	25	30
S2	10	10	15	20	25	30	35
S3	10	10	20	25	30	35	40
S4 (for 50 years)	10	15	25	30	35	40	45
S5	15	20	30	35	40	45	50
S6	20	25	35	40	45	50	55

Assessment of the slab depth

Span/depth ratio must satisfy the condition (for deflection control):

$$\lambda = \frac{L_s}{d_s} \leq \kappa_{c1} \kappa_{c2} \kappa_{c3} \lambda_{d,tab}$$

Effect of shape
1.0

Effect of span
1.0

Effect of reinforcement
1.2

Value from the table. (For slabs assume the value for 0,5 % reinforcement ratio.)

$\lambda_{d,tab}$ for outer span of the continuous beam/slab

	Concrete class						
ρ	12/15	16/20	20/25	25/30	30/37	40/50	50/60
0,5 %	19,0	20,5	22,1	24,1	26	33,5	41,5
1,5 %	15,9	16,4	16,9	17,6	18	19,5	20,8

If the condition is satisfied, detailed calculation of deflections may be omitted in later detailed assessment. However, usually the slab is uneconomical (i.e., could be thinner) if the condition is satisfied.

Assessment of slab depth

Usually, the slab is uneconomical if the span/depth condition is satisfied. Therefore, **do not try to satisfy this condition!** Only adjust the empirical design with respect to the results of the condition.

If the condition is not satisfied by a little (up to 20%), it is not necessary to change the slab depth.

If the condition is **not satisfied by a large amount (over 20%)**, it is advisable to **increase the slab depth by 10 to 50 mm** (depending on how much the conditions was not satisfied).

Task 1 – part 1

Beam

Cross-sectional dimension of the beam

Empirical estimation of beam height and width:

$$h_B = \frac{L_B}{15} \text{ to } \frac{L_B}{12},$$

$$b_B = \frac{h_B}{3} \text{ to } \frac{2h_B}{3},$$

To reach sufficient stiffness of the beam, the following must be true:


$$h_B \geq 2.5 h_s.$$

The beam height and width must be **multiple of 50 mm**.

Preliminary check of the beam

To avoid troubles during detailed assessment later (e.g., the beam is too thin and cannot be reinforced enough), preliminary check must be done.

First, we **estimate theoretical maximum values of internal forces** in the beam.

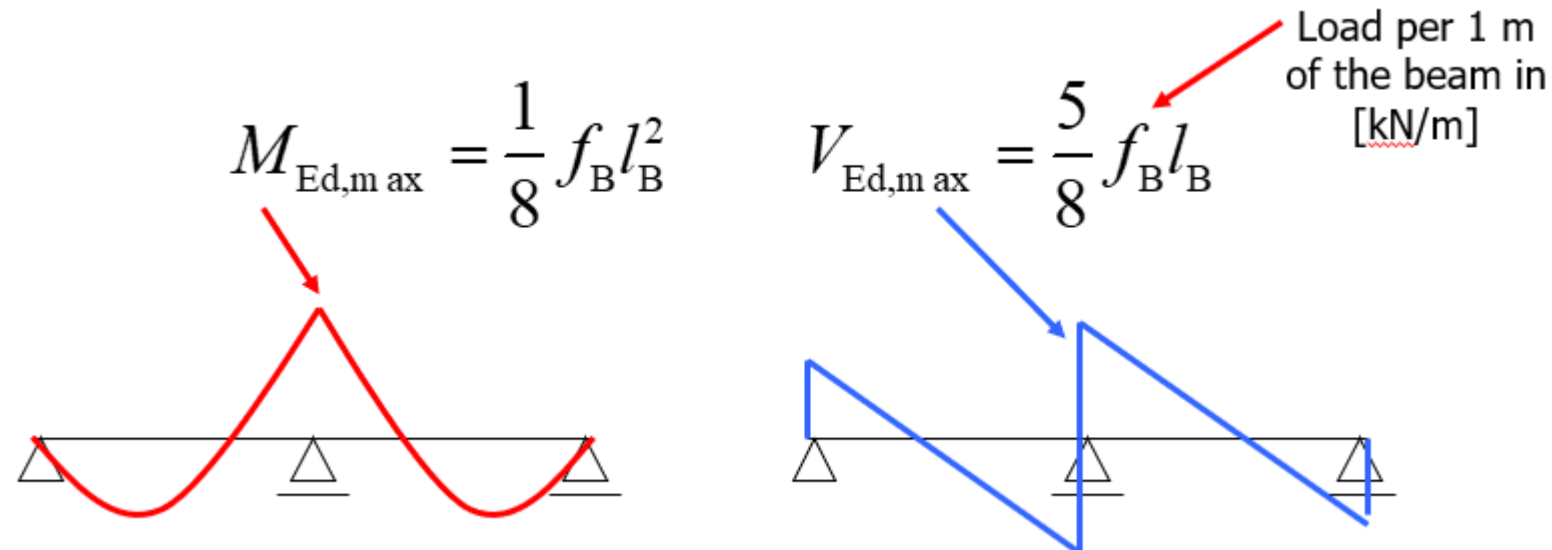

Preliminary check of bending

For the check of bending, we calculate *relative bending moment* and find corresponding *relative height of compressed part of the beam* in a [table](#).

$$\mu = \frac{M_{Ed,max}}{b_B d_B^2 f_{cd}}$$

table (see web)

ξ

Relative height of compressed part of the beam (x/d)

Effective height of the beam
(assume 16 to 22 mm diameter of rebars)

Relative bending moment

(a factor expressing to what extent the beam is utilized by the applied bending moment)

If $\xi \in \langle 0.15; 0.4 \rangle$, the design is ok.

If $\xi < 0.15$, you should decrease h_B and/or b_B .

If $\xi > 0.4$, you must increase h_B and/or b_B .

μ	ω	ξ	ζ
0,010	0,0101	0,013	0,995
0,020	0,0202	0,025	0,990
0,030	0,0305	0,038	0,985
0,040	0,0408	0,051	0,980
0,050	0,0511	0,064	0,974
0,060	0,0619	0,077	0,969
0,070	0,0726	0,091	0,964
0,080	0,0835	0,104	0,958
0,090	0,0945	0,118	0,953
0,100	0,1056	0,132	0,947

Preliminary check of reinforcement ratio

Reinforcement ratio must satisfy the condition:

$$\rho_{s,rqd} = \frac{A_{s,rqd}}{A_c} = \frac{\frac{M_{Ed,max}}{\zeta d_B f_{yd}}}{b_B d_B}$$

Required reinforcement ratio

Relative value of lever arm of internal forces (z/d) – see [table](#).

If $\rho_{s,rqd} > 0.4$, you must increase h_B and/or b_B .

Preliminary check of load-bearing capacity in shear

Maximal shear force must satisfy the condition of load-bearing capacity of “compression diagonals”:


$$V_{Rd,max} = \nu \cdot f_{cd} \cdot b_B \cdot \zeta \cdot d_B \cdot \frac{\cot \theta}{1 + \cot^2 \theta} \geq V_{Ed,max}$$

Load-bearing capacity
of compression
diagonals in shear

Coefficient expressing
effect of shear cracks and
transversal deformations

$$\nu = 0,6 \left(1 - \frac{f_{ck}}{250} \right)$$

Cotangent of angle of shear
cracks (assume $\cot \theta = 1,5$)

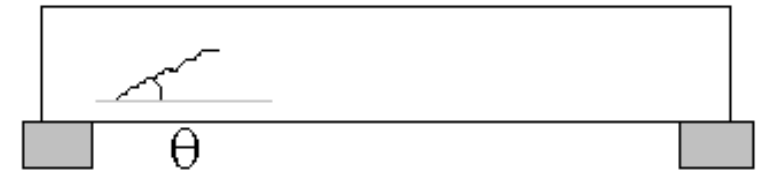

If the condition is not satisfied, you must increase h_B and/or b_B .

Preliminary check of deflection (span/depth ratio)

For the check of span/depth ratio, use the same calculation procedure as for slab with the following differences.

- Select a **row in the table for $\lambda_{d,tab}$** (outer span) **according to value of $\rho_{s,rqd}$** calculated above.
- If the **condition is not satisfied, you must increase h_B .**

Task 1 – part 1

Column

Cross-sectional dimension of the column

When designing column, the design load **in its foot** N_{Ed} must first be calculated.

The design load must satisfy the centric-load condition

$$N_{Rd} = 0.8A_c f_{cd} + A_s \sigma_s \geq N_{Ed}$$

Area of the cross-section ($A_c = b_c h_c$)


Reinforcement area (assume as $0.02 A_c$)

Reinforcement stress (assume as 400 MPa)

from which, the condition for column cross-sectional area can be derived

$$A_c \geq \frac{N_{Ed}}{0.8 f_{cd} + 0.02 \sigma_s}$$

Design the column cross-section (width and height) in such a way that the condition above is satisfied. The dimensions must be multiples of 50 mm.

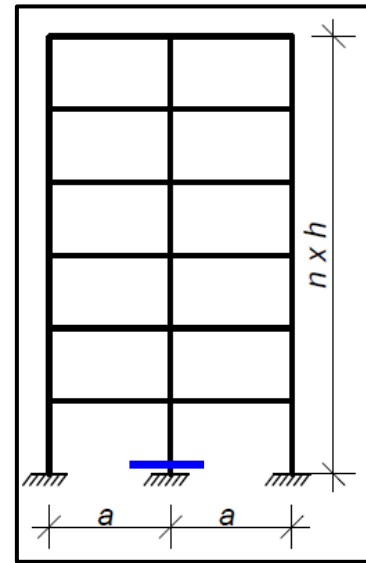

Task 1 – part 1

Sketch of the structure

Sketch of the structure

After designing the dimensions of all the elements, we have to make a **sketch of the structure**. The sketch must include:

- **plan view** of the structure (at least 2 fields in each direction),
- the **edges** of columns, beams and slabs,
- plan **dimensions**,
- **cut of the structure** perpendicular to the beams.

The sketch must show all designed dimensions of the elements.


Sketch of the structure

After designing the structure

- plan view of
- the edges of
- plan dimensions
- cut of the s

The sketch m

make a sketch of

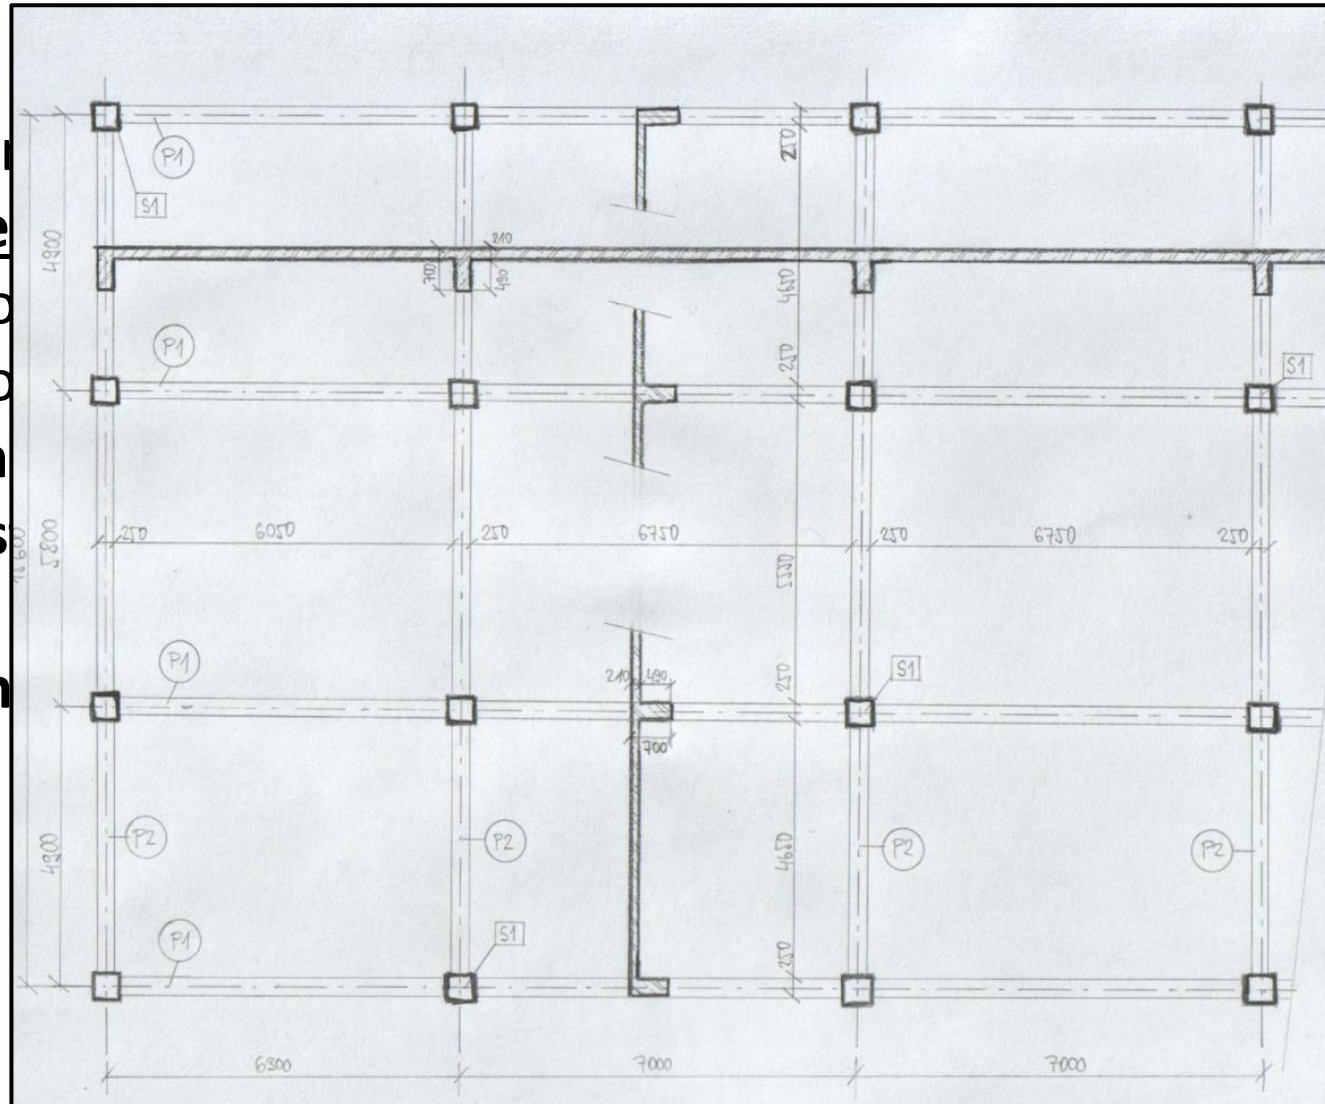

Task 1 – part 1

Examples of calculations used in the HW

Slab depth

Empirical estimation of slab depth for a slab with 6 m span:

$$h_s = \frac{L_s}{30} \text{ to } \frac{L_s}{25} = \frac{6000}{30} \text{ to } \frac{6000}{25} = 200 \text{ mm to } 240 \text{ mm} \rightarrow 200 \text{ mm}$$

Deflection control:

$$\frac{l}{d} = \frac{6000}{165} = 36.4 < 1.0 \cdot 1.0 \cdot 1.2 \cdot 33.5 = 40.2$$

Deflection control is satisfied $\rightarrow h_s$ can be decreased.

Final design: $h_s = 190 \text{ mm}$

Effective slab depth:

$$d = 190 - 20 - \frac{10}{2} = 165 \text{ mm}$$

Slab loads

Loads on the floor slab for other permanent loads 0.5 kN/m^2 and variable load 3.0 kN/m^2 .

Slab load			characteristic kN/m^2	γ_F	design kN/m^2
Permanent					
	other permanent load		0,50		
	self weight	$0,19\text{m} \cdot 25\text{kN/m}^3$	4,75		
	Total		$g_k = 5,25$	1,35	$g_d = 7,09$
Variable					
	(kategorie C1)		$q_k = 3,00$	1,5	$q_d = 4,50$
Total			$(g+q)_k = 8,25$		$(g+q)_d = 11,59$

Roof loads

Loads on the roof slab for other permanent loads 2 kN/m^2 and inaccessible roof (0.75 kN/m^2).

Roof load					
			characteristic	γ_F	design
			kN/m^2		kN/m^2
Permanent					
	other permanent load		2,00		
	self weight	$0,19\text{m} \cdot 25\text{kN/m}^3$	4,75		
	Total		$g_k = 6,75$	1,35	$g_d = 9,11$
Variable					
	(kategorie C1)		$q_k = 0,75$	1,5	$q_d = 1,125$
Total			$(g+q)_k = 7,5$		$(g+q)_d = 10,24$

Beam dimensions

Empirical design of beam height for a beam with 7 m span:


$$h_B = \frac{L_B}{15} \text{ to } \frac{L_B}{12} = \frac{7000}{15} \text{ to } \frac{7000}{12} = 467 \text{ mm to } 538 \text{ mm} \rightarrow h_B = 500 \text{ mm.}$$

Empirical design of beam width for a beam with 500 mm height:

$$b_B = \frac{h_B}{3} \text{ to } \frac{2h_B}{3} = \frac{500}{3} \text{ to } \frac{1000}{3} = 167 \text{ mm to } 333 \text{ mm} \rightarrow h_B = 250 \text{ mm.}$$

Tributing area of a column

When determining the point load acting on column from a single floor, we must assign all of the loads inside the [tributing area](#) to the column.

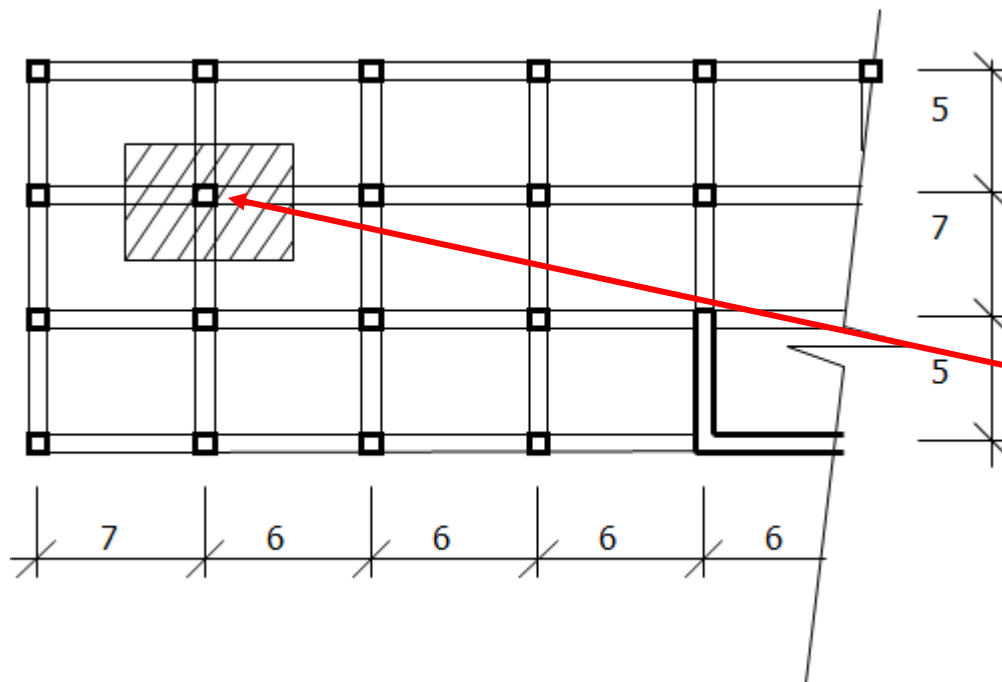


tributing area:

$$A = \left(\frac{7}{2} + \frac{6}{2}\right) \times \left(\frac{7}{2} + \frac{5}{2}\right) = 39 \text{ m}^2$$

Loading of a column

Point load for the internal column (column dimensions estimated as 300 mm × 300 mm and column height is 3.5 m) in a 6 floor structure.

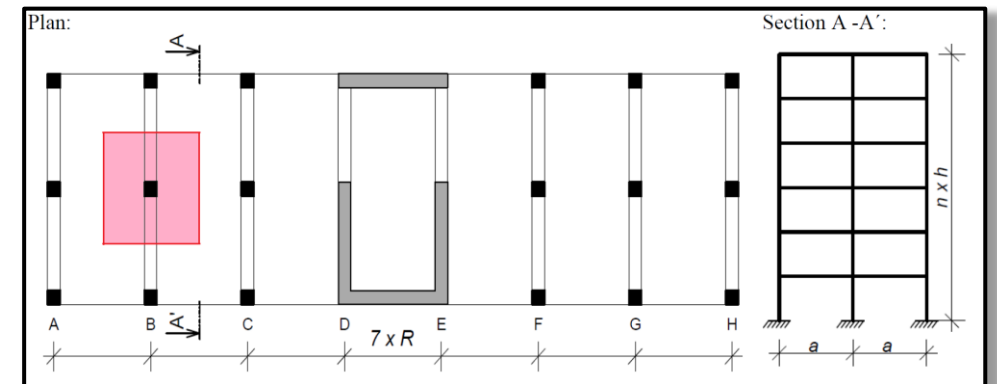

Point load of a column								
Load type	Load name	$f_{a,d}$	tributing area	$f_{lin,d}$	tributing length	$F_{1,d}$	number of members	F_d
-	-	kN/m ²	m ²	kN/m	m	kN	pcs	kN
AREA LOADS ($f_{a,d}$)	floor slab	11.59	39	-	-	452.0	5	2260.1
	roof slab	10.24	39	-	-	399.4	1	399.4
LINEAR LOADS ($f_{lin,d}$)	beam self weight	-	-	$(0.5-0.19) \cdot 0.25 \cdot 25 \cdot 1.35 = 2.62$	7	18.34	6	110.0
	column self weight	-	-	$0.3 \cdot 0.3 \cdot 25 \cdot 1.35 = 3.04$	3.5	10.6	6	63.8
SUM							$F_d =$	2833.3

Design of column dimensions

From the centric load condition

$$N_{Ed} = 0.8A_c \cdot f_{cd} + A_s \sigma_s$$

$$2.833 \text{ MN} = 0.8A_c \cdot 20 \text{ MPa} + (0.02A_c) \cdot 400 \text{ MPa}$$

minimal cross-sectional area is derived

$$2.833 \text{ MN} = 24A_c$$

$$A_{c,min} = 0.118 \text{ m}^2$$

→ column **350 mm × 350 mm** ($A_c = 122\,500 \text{ mm}^2$).

Next week

Next week

Next week we will focus on detailed **calculation of internal forces using FEM software**.

Are you able to use any Finite Element Analysis software?

If not, check easy-to-use software IdeaStatica and **apply for [student license](#)**.

When applying, **use your school student email** (e.g., “name.surname@estp.fr”).

thank you for your attention